

4K Network Standalone Type NVR




FEATURES

- 4K Ultra HD Recording NVR
- H.265, H.264 Video codec
- Various Storage : 6 SATA HDD, 4 e-SATA
- Network Function : DDNS, DHCP, UPNP
- Alarm, ATM, POS
- End of Line Register Sensor / Camera Tamper Sensor
- EOL Register Sensor
- Jog Shuttle
- Dual RS-485 Port, Dual LAN Port
- User-friendly Design(Interactive Front Panel) and GUI
- Bundled Software : CMS, RMS, Mac Viewer, Web Client
- Smartphone Viewer Application(Android/iPhone/iPad)

DIMENSION

(unit : mm)

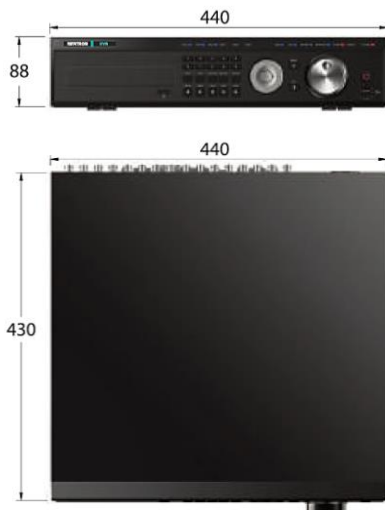

SPECIFICATION

| MODEL | | MDX7-3200 | MDX7-1600 |
|----------------------|----------------|--|-----------|
| DISPLAY | | | |
| | Channel | 32CH | 16CH |
| Camera | IP Camera | ONVIF | |
| | PoE Port | N/A | |
| Display | Speed | Max. 30fps/CH | |
| | Resolution | Max. 4K Ultra HD | |
| FUNCTION | | | |
| Operation System | | Embedded Linux | |
| REC. | Compression | H.265, H.264 | |
| | Speed | Max. 30fps/CH | |
| | Resolution | Max. 4K Ultra HD | |
| | Mode | Motion, Local Sensor | |
| Playback | Bit Rate | Max. 8Mbps/CH, Adjustable | |
| | Search | Go to first rec. time, Go to last rec. time, Go to last search time, Calendar, Log viewer, Smart search, Multi-time & day search, Event search | |
| | Speed | x1 ~ x32, x300 | |
| | Mode | Event only playback, Backward, Pause, Frame by frame | |
| Network | Interface | 2 X RJ45(10/100/1G) | |
| | Compression | H.265, H.264 | |
| | Speed | Max. 2Megapixel 15fps/CH | |
| | Resolution | Max. 2Megapixel(1920 x 1080P) | |
| Back-up | Mode | Bandwidth Control | |
| | Interface | USB, Network | |
| | Internal HDD | 6 HDD Bay | |
| | External HDD | 4 X eSATA | |
| | DVD | 1 x DVD(Optional) | |
| | Format | RMS, AVI | |
| PTZ / Keyboard | | 2 x RS-485 - Terminal Block | |
| POS/ATM | | RS-232C - Terminal Block, Ethernet POS | |
| Software | | CMS, RMS, Mac Viewer, MMS, APP(Android/iPhone/iPad) | |
| INTERFACE | | | |
| Video Output | VGA | 1 Full HD, SXGA, XGA | |
| | HDMI | 1 HDMI (4K, Full HD, SXGA, XGA) | |
| | Composite | 1 Composite (720x480) | |
| | Spot | 1 BNC(TVI) | |
| Audio | Compression | G.711u | |
| | Bit Rate | Depends on IP Camera | |
| | Input | Depends on IP Camera | |
| | Output | 1 HDMI | |
| Alarm | Input / Output | 4/1 - NC/NO | |
| | Pre/Post Alarm | 5sec ~ 5min | |
| | Action | E-mail, CH Popup, Buzzer, Relay, PTZ Preset, Remote VMS, Front LED | |
| GENERAL | | | |
| Power | NVR | AC90~240V 50/60Hz, 80W | |
| | PoE Input | N/A | |
| Operating Temp./Hum. | | 5°C ~ +40°C / Under 80% RH | |
| Dimension(mm) | | 440(W) x 88(H) x 430(D) | |
| Weight(kg) | | Approx. 8Kg (exclude HDD) | |

* Specification and design are subject to change without notice.