

4K Network Standalone Type NVR




FEATURES

- 4K Ultra HD Recording NVR
- H.265, H.264 Video codec
- Various Storage : 2 SATA HDD, 1 eSATA
- Network function for easy installation : DDNS, DHCP, UPNP
- Alarm, ATM, POS
- Two-way Audio
- End of Line Register Sensor / Camera Tamper Sensor
- Alarm in case of FAN failure
- User-friendly design (interactive front panel) and GUI
- Bundled Software : CMS, RMS, Mac Viewer, Web Client
- Smartphone Viewer Application(Android/iPhone/iPad)

DIMENSION

(unit : mm)

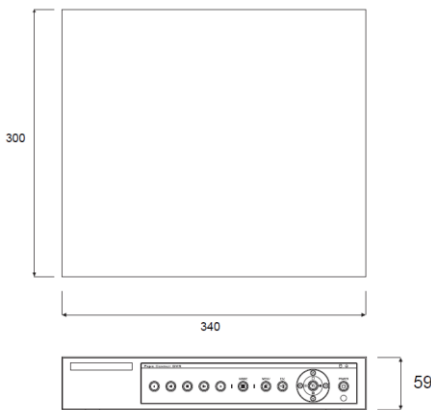

SPECIFICATION

MODEL	MMX7-1600	MMX7-0800	MMX7-0400	
DISPLAY				
Camera	Channel	16CH	8CH	4CH
	IP Camera	ONVIF		
	PoE Port	N/A		
Display	Speed	Max. 30fps/CH		
	Resolution	Max. 4K Ultra HD		
FUNCTION				
Operation System		Embedded Linux		
REC.	Compression	H.265, H.264	H.264	
	Speed	Max. 30fps/CH		
	Resolution	Max. 4K Ultra HD		
	Mode	Motion, Local Sensor		
Playback	Search	Go to first rec. time, Go to last rec. time, Go to last search time, Calendar, Log viewer, Smart search, Multi-time & day search, Event search		
	Speed	x1 ~ x32, x300		
	Mode	Event only playback, Backward, Pause, Frame by frame		
Network	Interface	RJ45(10/100/1G) x2		
	Compression	H.265, H.264		
	Speed	Max. 2Megapixel 15fps/CH		
Back-up	Resolution	Max. 2Megapixel(1920 x 1080P)		
	Mode	Bandwidth Control		
	Interface	USB2.0, Network		
	HDD	2 HDD, 1 eSATA 2 HDD or 1 HDD + 1 eSATA		
DVD	N/A			
Format	RMS, AVI			
PTZ / Keyboard	2 x RS-485 - Terminal Block			
POS/ATM	RS-232C - Terminal Block, Ethernet POS			
Software	CMS, RMS, Mac Viewer, MMS, APP(Android/iPhone/iPad)			
INTERFACE				
Video Output	VGA	1 VGA (Full HD, SXGA, XGA)		
	HDMI	1 HDMI (4K, Full HD, SXGA, XGA)		
	Composite	1 Composite (720x480)		
	Spot	1 BNC(TVI)		
Audio	Compression	G.711u		
	Bit Rate	Depends on IP Camera		
	Input	16CH	8CH	4CH
Alarm	Output	1 HDMI		
	Input / Output	4/1 - NC/NO		
	Pre/Post Alarm	5sec ~ 5min		
Action	E-mail, CH Popup, Buzzer, Relay, PTZ Preset, Remote VMS, Front LED			
GENERAL				
Power	NVR Input	12V / 5A - Level 6 , 60W		
	PoE Input	N/A		
Operating Temp./Hum.	5°C ~ +40°C / Under 80% RH			
Dimension(mm)	340(W) x 59(H) x 300(D)			
Weight(kg)	Approx. 3Kg (exclude HDD)			

* Specification and design are subject to change without notice.