

960H(Analog) 1Channel Video Server




FEATURES

- Dual Streaming of H.264 and M-JPEG
- Up to 30 frames per second in all image resolutions
- Max. Resolution : 960H(960x480)
- 1 Port analog video loop-out port
- 2 way Audio Support
- Supports IEEE 802.3af PoE injectors, mid/end-spans

DIMENSION

(unit : mm)

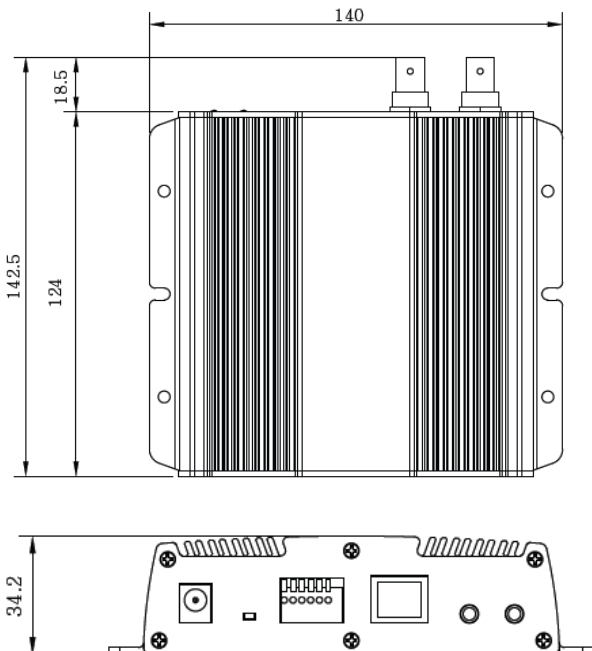

SPECIFICATION

MODEL	MNVS-202
GENERAL INFO.	
Sensor In/Out	1 / 1
Video In / Out	BNC / CVBS: VBS 1.0 Vp-p / 75Ω
Audio In / Out	1 / 1
RS-485	PELCO-D, PELCO-P, Etc.,
Power Source	DC 12V, 1.5A, PoE IEEE 802.3af(Optional)
Power Consumption	2.5W
Material	Aluminum Die-casting
Storage	Micro SD Slot
PTZ Control	PTZ Camera Control via Pelco-D/P Protocol
NETWORK	
OS	Embedded Linux
Video Compression	Dual Codec,H.264/MPEG4/MJPEG
Video Streaming	Multi Streaming CBR/VBR (Controllable frame rate and Bandwidth)
Frame Rate	Max.30/25fps for 960H
Audio Compression	Two way, G.711, 8KHz
Motion detection	Notification: FTP, e-mail, Alarm out
Video Buffer	5MB pre-alarm and 180 sec (max) post-alarm
Support Protocol	
Protocol	HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP
Security	Password protection, User access log, HTTPS encryption
OS Supported	Windows 7, Vista, XP, 2000
APPERANCE	
Dimension(mm)	140(W) x 347(H) x 124(D)
Weight	500g

* Specification and design are subject to change without notice.