

Centrally integrated control Server




FEATURES

- Max. 25,600 cameras connectable (256 x 100CH)
- Up to 32 full HD image simultaneous monitoring
- VNC connection support for remote configuration
- Event based live monitoring support
- System health monitoring
- Remote search, remote backup (manual, schedule)
- Event-based intelligent counterpart programming
- Multi-site automatic / manual warning voice transmission (broadcasting) function
- Camera settings can be changed.
- E-MAP function displays camera position on map
- PTZ control available
- Efficient management with dual monitoring support
- Pop-up image alarm function according to event
- *Uses USB type product when using KVM switch*
- *IP Video Wall System Control (Model Name : MV-NDS)*

DIMENSION

(unit : mm)

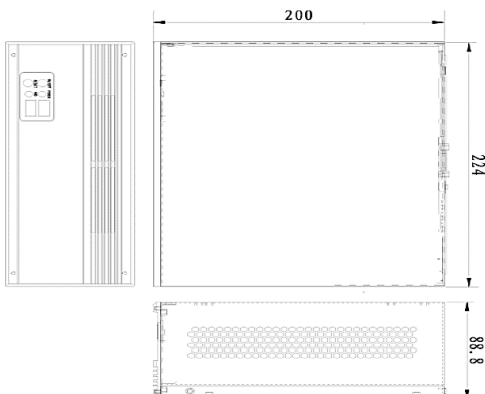

SPECIFICATION

MODEL	MV-CMS SERVER	
GENERAL INFO.		
CMS Version	Mone CMS Basic Linux 64bit (Option : Standard / Professional / Enterprise Version)	
Video Out	VGA x 1 and HDMI	
OS	Ubuntu Linux with Open GL and X-Windows	
CPU	Intel Dual Core 1.8GHz	
RAM	DDR3 16G RAM(8G x 2EA)	
VGA	Integrated Graphics	
HDD	MSATA SSD 32G	
LAN	10/100/1000 Base-Tx Ethernet (RJ45)	
FUNCTION		
Display	Resolution	1920x1080_Full HD
	Speed	960fps (Max.32CH@30fps)
	Screen	1x1, 2x2, 3x3 Various split screen & full screen modes
Playback	Search	Go to first rec. time, Go to last rec. time, Go to last search time, Calendar, Log viewer, Multi-time & day search, Event search
	Network Bandwidth	Auto
GENERAL INFO.		
Power Source	AC100~240V 50/60Hz	
Power Consumption	19V 3.42A	
Operating Temp./HR	5°C ~ 40°C / 0~90%	
Dimension(mm)	224(W) x 88.8(H) x 200(D)	
Weight	2.7Kg (exclude HDD)	

* 사양 및 디자인은 예고 없이 변경될 수 있습니다.